

	ENGLISH	SI	
Performance			
Sensitivity (±5 %)	10 mV/g	1.02 mV/(m/s ²)	[2]
Measurement Range	±500 g pk	±4905 m/s ² pk	
Frequency Range (±5 %)	1 to 7000 Hz	1 to 7000 Hz	
Frequency Range (±10 %)	0.7 to 11000 Hz	0.7 to 11000 Hz	
Frequency Range (±3 dB)	0.35 to 20000 Hz	0.35 to 20000 Hz	
Resonant Frequency	≥38 kHz	≥38 kHz	
Broadband Resolution (1 to 10000 Hz)	0.003 g rms	0.03 m/s ² rms	[1]
Non-Linearity	≤1 %	≤1 %	[3]
Transverse Sensitivity	≤5 %	≤5 %	[4]
Environmental			
Overload Limit (Shock)	±10000 g pk	±98100 m/s ² pk	
Temperature Range (Operating)	-65 to +250 °F	-54 to +121 °C	
Base Strain Sensitivity	≤0.0005 g/με	≤0.005 (m/s ²)/με	[1]
Electrical			
Excitation Voltage	18 to 30 VDC	18 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤100 Ohm	≤100 Ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Discharge Time Constant	0.5 to 2.6 sec	0.5 to 2.6 sec	
Settling Time (within 10% of bias)	<5 sec	<5 sec	
Spectral Noise (1 Hz)	2800 μg/√Hz	27468 (μm/sec ²) /√Hz	[1]
Spectral Noise (10 Hz)	700 μg/√Hz	6867 (μm/sec ²) /√Hz	[1]
Spectral Noise (100 Hz)	180 μg/√Hz	1766 (μm/sec ²) /√Hz	[1]
Spectral Noise (1 kHz)	64 μg/√Hz	628 (μm/sec ²) /√Hz	[1]
Physical			
Size (Height)	0.81 in	20.6 mm	
Weight	0.38 oz	10.5 gm	[1]
Sensing Element	Quartz	Quartz	
Size (Hex)	0.50 in	12.7 mm	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Welded Hermetic	Welded Hermetic	
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Side	Side	
Mounting Thread	10-32 Female	10-32 Female	

Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

B - Low bias electronics			
Output Bias Voltage	4.5 to 7.5 VDC	4.5 to 7.5 VDC	
Excitation Voltage	12 to 30 VDC	12 to 30 VDC	
Constant Current Excitation	1 to 20 mA	1 to 20 mA	
Measurement Range	±300 g pk	±2943 m/s ² pk	
J - Ground Isolated			
Frequency Range (±5 %)	1 to 5000 Hz	1 to 5000 Hz	
Frequency Range (±10 %)	0.7 to 9000 Hz	0.7 to 9000 Hz	
Resonant Frequency	≥22 kHz	≥22 kHz	
Electrical Isolation (Base)	≥10 ⁸ Ohm	≥10 ⁸ Ohm	

Q - Extended discharge time constant			
Frequency Range (±5 %)	0.1 to 7000 Hz	0.1 to 7000 Hz	
Frequency Range (±10 %)	0.07 to 11000 Hz	0.07 to 11000 Hz	
Discharge Time Constant	>10 sec	>10 sec	
Settling Time (within 10% of bias)	45 sec	45 sec	
Supplied Accessory: Model ACS-4 Single-axis, low frequency phase and amplitude response calibration from 0.5 to 10 Hz			


W - Water Resistant Cable			
Electrical Connector	Sealed Integral Cable	Sealed Integral Cable	
Electrical Connection Position	Side	Side	

- Notes**
- [1] Typical.
 - [2] B and Q options supplied with a sensitivity tolerance of ± 10 %.
 - [3] Zero-based, least-squares, straight line method.
 - [4] Transverse sensitivity is typically ≤ 3%.
 - [5] See PCB Declaration of Conformance PS023 for details.

Supplied Accessories

- 080A Adhesive Mounting Base (1)
- 080A109 Petro Wax (1)
- 081B05 Mounting Stud (10-32 to 10-32) (1)
- ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)
- M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)

Entered: BAM	Engineer: WDC	Sales: ECB	Spec Number:
Date: 03/25/2011	Date: 03/25/2011	Date: 03/25/2011	353-2030-80

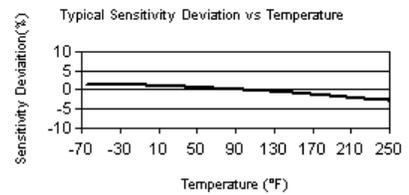

3425 Walden Avenue
 Depew, NY 14043
 UNITED STATES
 Phone: 800-828-8840
 Fax: 716-684-0987
 E-mail: info@pcb.com
 Web site: www.pcb.com

All specifications are at room temperature unless otherwise specified.

In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB group, Inc.